

08/25/00

jc872 U.S. PTO

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

+

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No.	DB000877-000
First Inventor or Application Identifier	Sarathi et al.
Title	PRODUCTION AND DISTRIBUTION SUPPLY CHAIN OPTIMIZATION SOFTWARE
Express Mail Label No.	EJ116542585US

jc862 U.S. PTO
09/648861

08/25/00

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

- ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
- ☒ Specification [Total Pages 19]
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
- ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 3]
- Oath or Declaration [Total Pages]
 - ☐ Newly executed (original or copy)
 - ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

- ☐ Microfiche Computer Program (Appendix)
- Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - ☐ Computer Readable Copy
 - ☐ Paper Copy (identical to computer copy)
 - ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

- ☐ Assignment Papers (cover sheet & document(s))
- ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)
- ☐ English Translation Document (if applicable)
- ☐ Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations]
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
- ☐ * Small Entity Statement(s) [Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)]
- ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
- ☐ Other:

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT, IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____
Prior application information: Examiner _____ Group / Art Unit: _____
For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label [Insert Customer No. or Attach bar code label here] or ☒ Correspondence address below

Name	Edward L. Pencoske, Esq.				
Address	Thorp Reed & Armstrong, LLP One Riverfront Center				
City	Pittsburgh	State	PA	Zip Code	15222-4895
Country	U.S.A.	Telephone	412/394-7789	Fax	412/394-2555

Name (Print/Type)	Edward L. Pencoske	Registration No. (Attorney/Agent)	29,688
Signature		Date	25 August 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

+

08-28-00

4

EXPRESS MAIL MAILING LABEL

Number: EJ116542585US
Date of Deposit: August 25, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231

THORP, REED & ARMSTRONG, LLP
One Riverfront Center
Pittsburgh, PA 15222-4895

jc862 U.S. PTO
09/648861
08/25/00

PATENT

Attorney Docket No.: DB000877-000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Sarthi et al.)
Serial No.: Not Yet Assigned)
Filed: August 25, 2000)
Entitled: PRODUCTION AND DISTRIBUTION SUPPLY CHAIN OPTIMIZATION SOFTWARE

TRANSMITTAL FOR PATENT APPLICATION

To: Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Dear Sir:

Enclosed for filing is the above-referenced patent application. Transmitted herewith for filing are:

1. Utility Patent Application Transmittal (Form PTO/SB/05);
2. Fee Transmittal (Form PTO/SB/17) and a check in the amount of \$1,692.00;
3. Nineteen (19) pages of specification including forty-one (41) claims; and
4. Three (3) sheet of figures including five (5) informal drawings.

Also enclosed is a return postcard. Please date stamp the postcard and return it to us to acknowledge receipt of this patent application.

The Commissioner is hereby authorized to charge any underpayment or credit any overpayment to our Deposit Account No. 20-0888. A duplicate copy of this Transmittal letter is enclosed.

Respectfully submitted,



Edward L. Pencoske

Reg. No. 29,688

THORP REED & ARMSTRONG, LLP

One Riverfront Center, 7th Floor

Pittsburgh, PA 15222-4895

(412) 394-7789

Dated: August 25, 2000

Attorneys for Applicant

00251577

5

**Production and Distribution
Supply Chain Optimization Software**

Background of the Invention

10 **Field of the Invention**

The present invention is directed generally to the field of business accounting systems and, more particularly, to methods and apparatus for optimizing production and distribution supply chains as well as other complex systems.

15 **Description of the Background**

Production and distribution supply chains have grown into large and complex systems. Consider, for example, an automobile manufacturer. The thousands of components that go into an automobile are supplied by hundreds, perhaps thousands, of individual suppliers, each having its own suppliers, production facilities, labor costs, transportation costs, etc. The supply chain for such large enterprises is a very complex system and, unfortunately, is a result more of history than of a deliberate effort to build an optimized system. After the supply chain is in place, decisions tend to be localized such that their impact on the entire supply chain is not known until some history of operation under that decision is gathered. Even then, supply chains tend to be so complex and poorly understood, that even with historical operational data, it is often not known how best to change operations to move the entire system to a more optimized condition.

Current business techniques, such as activity based costing, provide a more reliable way of viewing a company's operations. In activity based costing, the cost and performance of activities and products is measured and quantified. An example of an automated, activity-based management system is disclosed in U.S. Patent No. 5,799,286. Disclosed in that patent is a system in which traditional ledger accounting information and human resources information is used with other information directed to activities, equipment usage, and facilities utilization to generate costs associated with activities performed by the organization. The traditional accounting information and the activity information are fed into a relational database. The information is processed and costs associated with the employee, facilities, equipment, and overhead components of

5 activities are computed. User defined reports for trending, forecasting, comparison, benchmarking, and budgeting purposes can be generated.

While such systems are a step forward, they represent the type of localized decision making that is not well suited to complex systems such as production and distribution supply chains. As mentioned previously, optimizing one organization within
10 a production and distribution supply chain may lead to problems elsewhere in the system. Furthermore, traditional activity based costing models do not take into account non-economic considerations. Supply chains can have various non-economic measures of performance, which may or may not be important in optimizing the system. Some examples of these would include:

15 a. Product freshness: This measure is particularly important in supply chains in the food industry (for example, fast food restaurant chain), where the considerations of freshness will be as important as (if not more than) a purely economic decision.

That is, some less than optimum procedures may need to be tolerated (deliveries every day at higher cost as opposed to every four days at lower cost) to ensure
20 freshness of goods.

b. Product Lifecycle: This refers to the total time spent in a supply chain from the inception and design of a product to its ultimate delivery to an end customer. This is an important issue in industries with short lifecycles such as the garment industry, where the demand can be very unpredictable.

25 c. Robustness of solutions. The final optimized solution for the supply chain is with one set of values for the underlying variables. The range of the values for these variables, for which the solution is still a valid optimal solution, is the measure of the robustness of the solution.

Traditional activity based costing methods also do not provide sufficient
30 flexibility to account for uncertainties in the market place. The most common and important source of uncertainty for a supply chain is likely to be in the *projected* demand for products. However, depending on the nature of the specific supply chain, the design may be very sensitive to factors such as raw material costs and availability (especially with commodity market sourcing) and exchange rates (in more international supply
35 chain). In general, the uncertainty can occur due to:

- a. Demand uncertainty – Product volumes, product mix
- b. Supply uncertainty – Raw materials availability, raw material costs
- c. Resource availability – Labor, unscheduled downtime of resources (lines, plants), costs of resources (labor, fuel)
- d. Other factors – e.g. interest and exchange rates

It is important to note that each of these can have seasonal, promotional and regional/national effects. A key issue then is to design a system that is *flexible* in handling a large range of each of these variables, and to know the costs of building in this flexibility into the system.

To date, there is no system for modeling a complex supply chain, in an integrated manner, and that takes into account non-economic factors and market uncertainties. Accordingly, the need for such a system exists.

Summary of the Present Invention

The present invention is directed to a method of modeling a complex system or process, the model produced by such a method, and a method of optimizing a complex system or process by optimizing such a model. Turning first to the method of modeling, the first step is to identify the activities that comprise the system or process. Measurable drivers for each activity are identified. The costs associated with each driver are identified as fixed and, where appropriate, variable components. Each activity is then represented as a function of its driver's cost components. Certain of the drivers will be relevant to more than one activity. Those drivers are indicative of the interdependence between activities. Relationships between the drivers that are relevant to more than one activity are derived. A function that represents the system or process is built using the derived relationships. The function may also include certain of the drivers that are relevant to only one activity.

The model thus produced is an expression of the entire system or process in terms of variables that are drivers for more than one activity within the process. More specifically, the model is preferably embodied in a computer program as a series of instructions that express the system or process as a function of cost components for drivers for the activities that make up the system or process. As a result, the effects of

5 changes on one activity can be seen throughout the entire system or process. When a production and distribution supply chain is modeled, the model of the present invention makes costs, cycle time, end products, and the like for the entire chain visible and understandable.

10 Finally, the present invention is directed to a method of optimizing a system or process. That is accomplished by optimizing the model constructed as described above for certain selected objectives. The model can be modified by changing constraints thus enabling the user to run through a large number of “what if” scenarios to determine what is the best solution under varying conditions.

15 Those advantages and benefits, and others, will be apparent from the description of the preferred embodiment hereinbelow.

Brief Description of the Drawings

20 For the present invention to be easily understood and readily practiced, the present invention will now be described, for purposes of illustration and not limitation, in conjunction with the following figures wherein:

FIG. 1 illustrates a computer system upon which the software embodying the optimization model of the present invention may reside;

25 FIG. 2 is a conceptual block diagram of the various types of information that are taken into account by the modeling process of the present invention when constructing a model according to the teachings of the present invention;

FIG. 3 is a block diagram of the method of building a model of a production and distribution supply chain according to the teachings of the present invention;

30 FIG. 4 is a block diagram of the method of using the model of the present invention to manage a production and distribution supply chain; and

FIG. 5 illustrates exemplary inputs and outputs in a case where a model of the present invention is used to minimize costs

Description of the Preferred Embodiments

35 FIG. 1 illustrates a computer system 10 which may be comprised of a general purpose computer 12, a keyboard 14, mouse 16, and a monitor 18. Other types of input

5 devices (scanners, microphones, etc.) and other types of output devices (speakers, printers, etc.) may be used depending upon the needs of the user. A computer program 20 embodying a model of a complex process or system, e.g. a production and distribution supply chain, constructed according to the present invention may reside on the hard drive (not shown) of the general purpose computer 12. Alternatively, the computer program 20 may reside on a disc 22 that is read by a disc drive 24, or the program 20 may be stored elsewhere and accessed by the computer system 10 through operation of a modem (not shown), a local area network (LAN), the Internet, the worldwide web via a browser, or other communications media. The present invention is not limited by the manner in which the computer program 20 is made available to the computer system 10 or by particular language used to implement the program 20.

There are at least three different aspects to the present invention:

1. a method of modeling a complex process or activity, such as a production and distribution supply chain;
2. the model produced as a result of the modeling method; and
3. using the model to manage the process or activity.

While the present invention is described in terms of a production and distribution supply chain, the reader will recognize that other complex processes or systems could be similarly modeled and managed. The complex process may include one or more:

- a. Manufacturing systems;
- b. Distribution systems;
- c. Raw material sourcing;
- d. Second (or multi) tier supply and sourcing; and
- e. Retail operations.

FIG. 2 is a conceptual block diagram of the various types of information that are taken into account when constructing an optimization model 26 according to the teachings of the present invention. The optimization model 26 takes into account demand data 28, plant and equipment utilization, resource options/availabilities 30, uncertainty and risk management policies 32, manufacturing and distribution data 34, pricing policies and other business model issues 36, and other supply information 38. The present

invention integrates these various types of information to provide a structured model of, for example, a production and distribution supply chain.

The present invention takes a holistic approach to modeling complex processes and systems. Through the modeling process of the present invention, concepts in economics, decision theory, activity based management, operations research, uncertainty management and real options are integrated to produce the optimization model of the present invention. The model is an easy to use, practical solution to, for example, production and distribution supply chain management and optimization. Decision makers can use the model of the present invention to optimize the supply chain by working through various strategies, to view the effects of reengineering the supply chain, or to make investment decisions to respond to current and emerging business needs. The model enables decision makers to work collaboratively to develop optimal solutions based upon actual measurements. The model makes costs, cycle time and end products for the entire supply chain visible and understandable. The impact of local actions can be seen upon the entire chain. The model may be used to reduce costs, reduce cycle time and increase product diversity.

Turning now to FIG. 3, FIG. 3 illustrates a method for constructing a model of a production and distribution supply chain. The reader will understand that the method of FIG. 3 may be applied to any complex system or process. The first step in method 40 is step 42 which is an identification of the supply chain and data collection related to the supply chain. In most instances, businesses will already have between 70% and 90% and the data needed for construction of the model. The next step of FIG. 3, step 44, is to identify the activities that comprise the process. All supply chains are composed of a number of value-adding activities that are performed in succession to deliver a set of products or services to their customer, which may be another node in the production and distribution supply chain. These value adding activities include activities related to procurement of goods and services, manufacturing and warehousing, distribution, sales and corporate activities that add indirect costs to the supply chain. The supply chain can thus be broken down into a distinct set of such activities, i.e.



5 where A1, A2,...,A9, A10, etc. are distinct activities that, taken together, constitute the supply chain.

The next step, step 46, requires that the key drivers for each activity, and the resources needed for that activity, be identified. Each activity in the supply chain depends on one or more variables that drive its costs. These variables are the activity drivers, and the cost of the activity can be represented as a function of these drivers:

$$\text{Cost}_{A1} = F(v_1, v_2, v_3, \dots)$$

15 where $F(\dots)$ refers to a function of one or more variables (v). Here, v_1, v_2, v_3 etc are the activity drivers for activity 1. The drivers for each activity depend on the kind of activity being performed. For example, production activities will typically depend on the hours of production as well as the volume of product being made, while an order receiving activity may depend on the number of orders received from customers. This part of the modeling process is similar to activity cost accounting.


As an example, consider the activity of storing a number of cases of various products in inventory at a distribution center that serves a number of demand points (such as stores or restaurants). The average number of cases that is stored in inventory on any given day, usually referred to as the cycle stock, depends on the average case volume that is to be delivered to the stores. However, to handle day to day variance in the demand from the stores, the distribution center will typically keep a buffer stock in addition to the cycle stock. The cost of the storage activity is then a sum of the cost of storing the cycle stock and buffer stock. The primary driver for this cost is the average demand from the stores, while a secondary driver for the cost is the variance in the predicted demand from the stores.

As another example, consider the issue of product freshness in designing a food distribution system. Freshness of food items (very important to consumer tastes and perceptions) is typically measured in terms of their shelf life, which can range from 6-8 days for produce items (tomatoes, lettuce) to 3-6 months for frozen meat. The optimal design of such a system must therefore ensure that the produce items such as tomatoes are delivered to the end customer no later than 6-8 days from when they were picked at the farms. This, in turn, depends on the delivery frequency of the distributors, i.e. how

often the produce items are shipped from supplier to DCs and from DCs to stores. The cost of the distribution system, in turn, is affected by the delivery frequency, with ordering and shipping costs typically going up as delivery frequency increases (from say once every 4 days to once a day). Therefore, the delivery frequency is a critical driver in the design of a distribution system for short shelf life items. Similarly, other measures of the system such as cycle time, robustness, etc. can be modeled.

Step 48 is to break down the activity costs into fixed and, where appropriate, variable components and represent each activity as a function of its cost components. Each activity cost typically has a fixed cost component and a variable cost component, which usually depend on different drivers. The fixed cost of the activity depends on the maximum expected level of the activity drivers, and is therefore limited by the capacity of the activity. The variable costs of each activity, on the other hand, typically depend only on the mean or average level of the activity drivers.

Consider again the example of the inventory storage activity. If d is the average volume of cases expected from the demand points, and σ is the expected variance in the demand from day to day, then
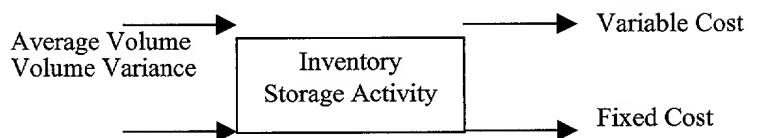
$$\begin{aligned} \text{Cost}_{\text{inv}} &= \text{VC}_{\text{inv}} + \text{FC}_{\text{inv}} \\ \text{VC}_{\text{inv}} &= C_V \cdot (d) \\ \text{FC}_{\text{inv}} &= C_F \cdot (d + 2 \sigma) \end{aligned}$$


The diagram shows a central box labeled "Inventory Storage Activity". Two arrows enter the box from the left: the top one is labeled "Average Volume" and the bottom one is labeled "Volume Variance". Two arrows exit the box to the right: the top one is labeled "Variable Cost" and the bottom one is labeled "Fixed Cost".

where C_V and C_F are the unit variable and fixed costs, respectively, and VC_{inv} and FC_{inv} are the variable and fixed costs of inventory, respectively. While the fixed and variable cost classification is the most common, it is only one of several possible classifications. Some components of costs can sometimes require more complex functionality. For example, when the additional capacity for storage can only be added in increments, then the fixed costs of inventory storage will then become a step function.

In step 50, an interrelationship between activities is established by identifying drivers that are relevant to more than one activity. Those drivers are referred to as bridge or system variables. While each activity in the supply chain has its own driver(s), there is usually a common set of drivers or variables that connect two or more activities in the

5 supply chain together. The relationships between the bridge variables allows the entire supply chain to be represented using a single function.

Consider another activity such as transportation, by which the cases from the
aforementioned distribution center are delivered to one or more stores. This activity cost
is a complex function of the number of routes and miles needed to deliver the cases to the
10 stores. It may be represented as

$$VC_{Trans} = F (Routes, d)$$

$$FC_{Trans} = F (Routes, d)$$

15 However, the number of routes in turn depends on the case volume being delivered, i.e.

$$Routes = F (d)$$

It can thus be seen that the case volume, d , may be used as a bridge variable, because it
affects the cost of both the transportation and inventory storage activities.

Turning to step 52, once all such bridge variables are identified, the functionality
for relating the drivers for each activity in the supply chain to these bridge variables is
determined. That allows the costs of each activity to be modeled as a function of the
bridge variables. For example, if the transportation is done using trucks (with one route
per truck), and the capacity of each truck is 1000 cases with an average packing
25 efficiency of 80%, then

$$\begin{aligned} Routes &= d / (1000 \times 0.8) \\ &= d / 800 \end{aligned}$$

30 The costs of each activity are then modeled as a function of the bridge variables. Thus,

$$VC_{Trans} = F (d)$$

$$FC_{Trans} = F (d)$$

35

5 The total supply chain cost is then simply a sum of the cost of all the activities, i.e.

$$\begin{aligned} VC_{SC} &= VC_{A1} + VC_{A1} + \dots + VC_{A9} + VC_{A10} + \dots \\ FC_{SC} &= FC_{A1} + FC_{A1} + \dots + FC_{A9} + FC_{A10} + \dots \end{aligned}$$

10 Where VC_{A1} is the variable cost of activity 1 (and so on). Then, the total cost of the supply chain is

$$\begin{aligned} TC_{SC} &= VC_{SC} + FC_{SC} \\ &= F(b_1, b_2, \dots, b_{10}, \dots, p) \end{aligned}$$

15

where $b_1, b_2 \dots$ are the various bridge variables in the supply chain (such as the case volume d in the example above) and p is a set of constraints.

Once the supply chain is modeled as a function of at least the bridge variables, the function will be optimized at step 54 with known data or otherwise tested to verify the accuracy of the model. As a result, some modifications to the model may be made. Once the model is completed at step 56, it is ready to be used to manage the system or process that has been modeled.

FIG. 4 is a block diagram illustrating how the model 26 of the present invention may be used to manage a complex system that has been modeled while FIG. 5 illustrates exemplary inputs and outputs in a case where the model 26 is being used to minimize costs. The reader will recognize that using the model to minimize costs is only one way in which the model 26 may be used to manage a complex system. Other objectives include maximizing freshness, minimizing delivery frequencies, or any of a large number of other objectives.

30 In step 58, the objective(s) to be solved for are selected. In step 59 the constraints to be applied are selected. As an alternative to optimizing the model for a given objective function, the model 26 can be optimized by using these measures in the constraints of the model

In step 60 the model is minimized by minimizing the function which is representative of the process. For example,

35

5

$$\text{Minimize} \quad TC_{SC} = F (b_1, b_2, \dots, b_{10}, \dots, p)$$

subject to

10

Capacity Constraints

Labor Constraints

Business Constraints

$$F (CycleTime_{SC}) \leq 0$$

15

Here, the objective is to minimize the total cost of the supply chain, with a constraint on the total cycle time of the supply chain. If the supply chain is to be analyzed from a short-term perspective, then typically only the variable costs will be used in the objective (instead of the total cost).

20

The model is then solved using either standard or customized algorithms for optimization. The complexity of the functionality of the costs and constraints in the system will determine the choice of the optimization algorithm. If all the cost functions and constraints are linear, then a linear programming (LP) algorithm is used. If there are step functions or discrete decisions (such as a decision to add or remove a production line) involved, then a mixed-integer linear programming (MILP) solver is used. If any of the functionality is nonlinear, then a mixed-integer nonlinear programming (MINLP) algorithm is used.

25

30

The final step 62 is to reconstruct the physical representation from the optimized model. Recall that the supply chain has been modeled primarily as a function of the bridge variables. The relationship of the bridge variables to each activity may or may not be inherent. Once the supply chain model has been optimized, then the original activity drivers and activity costs can be calculated from the bridge variables. For example, suppose that the optimal case volume d (which is a bridge variable) for the transportation and inventory storage activities is 100,000. In the transportation activity, the number of routes can be calculated as

35

$$\begin{aligned}
 \text{Routes} &= d / 800 \\
 &= 125
 \end{aligned}$$

The variable transportation costs can then be calculated as

$$VC_{\text{Trans}} = F(\text{Routes}, d) = F(125, 100000)$$

Similarly, the fixed and total costs of transportation can be calculated. This step 48 allows the reconstruction of the physical representation of the supply chain activities, such as the individual capacity needed, resource requirements (such as the number of trucks required to service the routes for transportation in this example), the financial impact of any changes in the system, and other operational variables such as lead times, product quality, etc.

The model performs supply chain decision analyses in a multi-product, multi-plant, manufacturing and multi-tier distribution environment. The model incorporates the effect of lead-times, costs and other value drivers in the various activities comprising the supply process. Thus, after step 62 is complete, it is possible to return to steps 58 and 59, and either change the objectives or change the constraints, or both, and run the model again to see what happens under the changed conditions. FIG. 5 provides an illustration of exemplary inputs, constraints and outputs.

Models produced according to the method of the present invention may be focused primarily on measuring the supply chain performance for a given user-defined supply chain architecture and process. The model uses constraints (such as business rules, capacity etc.) to evaluate or optimize the decision variables selected. The user can modify the process or the constraints to see the impact on the chain's performance. The user can thus compare different alternatives. Usually, the "dependent decisions" or decisions that depend from the supply chain design (such as number of manufacturing lines, vendor DC alignment etc.) can be optimized for the least system cost if the user desires.

5

While the present invention has been described in conjunction with preferred embodiments thereof, those of ordinary skill in the art will recognize that many modifications and variations are possible. The foregoing description and the following claims are intended to cover all such modifications and variations.

What is claimed is:

1. A method of creating a model of a process, comprising:
identifying activities that comprise the process;
identifying measurable drivers for each of the activities;
costing the drivers;
representing a relationship between various drivers to reflect interdependence between activities; and
building a function that represents the process by using the relationships.
2. The method of claim 1 wherein the step of building a function includes the steps of representing each activity as a function of its drivers, and using certain of said activity representations in said function representative of the process.
3. The method of claim 1 additionally comprising the steps of optimizing the function, and using the results from said optimization step to revise the function.
4. The method of claim 1 wherein said step of identifying measurable drivers includes the step of identifying economic and non-economic drivers.
5. The method of claim 1 wherein said step of costing the drivers includes identifying at least one of fixed and variable components.
6. The method of claim 5 additionally comprising the step of identifying drivers for said fixed and variable components and costing said drivers for said fixed and variable components.
7. A method of creating a model of a process, comprising:
identifying activities that comprise the process;
identifying measurable drivers for each of the activities;
costing the drivers;
representing each activity as a function of its drivers;
identifying drivers used in more than one activity;
representing the relationship between said identified drivers to reflect interdependence between activities; and
building a function that represents the process by using the relationships.

8. The method of claim 7 wherein the step of building a function includes the step of using certain of said activity representations in said function representative of the process.

9. The method of claim 7 additionally comprising the steps of optimizing the function, and using the results from said optimization step to revise the function.

10. The method of claim 7 wherein said step of identifying measurable drivers includes the step of identifying economic and non-economic drivers.

11. The method of claim 7 wherein said step of costing the drivers includes identifying at least one of fixed and variable components.

12. The method of claim 11 additionally comprising the step of identifying drivers for said fixed and variable components and costing said drivers for said fixed and variable components.

13. A method, comprising:
identifying activities that comprise a process;
identifying measurable drivers for each of the activities;
costing the drivers into at least one of fixed and variable components;
identifying drivers used in more than one activity;
representing the relationship between said identified drivers to reflect interdependence between activities; and
building a function that represents the process by using the relationships.

14. The method of claim 13 wherein the step of building a function includes the steps of representing each activity as a function of its drivers, and using certain of said activity representations in said function representative of the process.

15. The method of claim 13 additionally comprising the steps of optimizing the function, and using the results from said optimization step to revise the function.

16. The method of claim 13 wherein said step of identifying measurable drivers includes the step of identifying economic and non-economic drivers.

17. The method of claim 13 additionally comprising the step of identifying drivers for said fixed and variable components and costing said drivers for said fixed and variable components.

18. A computer readable medium encoded with a computer program embodying a model of a process of the type comprised of a plurality of activities, comprising:

a series of instructions expressing the process as a function of variables that are drivers for more than one activity.

19. The medium of claim 18 wherein the drivers include economic and non-economic drivers.

20. The medium of claim 18 wherein the variables include fixed and variable components of said drivers.

21. A system, comprising:

a computer;

input and output devices in communication with said computer, and

a memory encoded with a computer program embodying a model of a process of the type comprised of a plurality of activities, said computer program comprising a series of instructions expressing the process as a function of variables that are drivers for more than one activity.

22. The system of claim 21 wherein the drivers include economic and non-economic drivers.

23. The system of claim 21 wherein the variables include fixed and variable components of said drivers.

24. A computer readable medium encoded with a computer program embodying a model of a process of the type comprised of a plurality of activities, comprising:

a series of instructions expressing the process in terms of variables that are drivers for more than one activity and variables for drivers for a single activity.

25. The medium of claim 24 wherein the drivers include economic and non-economic drivers.

26. The medium of claim 24 wherein the variables include fixed and variable components of said drivers.

27. A system, comprising:

a computer;

input and output devices in communication with said computer, and
a memory encoded with a computer program embodying a model of a process of the type comprised of a plurality of activities, said computer program comprising a series of instructions expressing the process in terms of variables that are drivers for more than one activity and variables for drivers for a single activity.

28. The system of claim 27 wherein the drivers include economic and non-economic drivers.

29. The system of claim 27 wherein the variables include fixed and variable components of said drivers.

30. A method of optimizing a process, comprising:
selecting at least one objective; and
minimizing, for said selected objective, a function that represents the process in terms of variables that are drivers for more than one activity within the process.

31. The method of claim 30 additionally comprising the step of reconstructing the physical model based on the results of said minimizing step.

32. The method of claim 30 additionally comprising the step of selecting a set of constraints to be used in said minimizing step.

33. A method of optimizing a process, comprising:
selecting at least one objective; and
minimizing, for said selected objective, a function that represents the process in terms of variables that are drivers for more than one activity within the process and variables that are drivers for a single activity within the process.

34. The method of claim 33 additionally comprising the step of reconstructing the physical model based on the results of said minimizing step.

35. The method of claim 33 additionally comprising the step of selecting a set of constraints to be used in said minimizing step.

36. A computer readable medium encoded with instructions which, when executed by a computer, perform a method comprising:
selecting at least one objective; and
minimizing, for said selected objective, a function that represents a process in terms of variables that are drivers for more than one activity within the process.

37. The computer readable medium of claim 36 wherein said method additionally comprises the step of reconstructing the physical model based on the results of said minimizing step.

38. The computer readable medium of claim 36 wherein said method additionally comprises the step of selecting a set of constraints to be used in said minimizing step.

39. A computer readable medium encoded with instructions which, when executed by a computer, perform a method comprising:

selecting at least one objective; and

minimizing, for said selected objective, a function that represents a process in terms of variables that are drivers for more than one activity within the process and variables that are drivers for a single activity within the process.

40. The computer readable medium of claim 39 wherein said method additionally comprises the step of reconstructing the physical model based on the results of said minimizing step.

41. The computer readable medium of claim 39 wherein said method additionally comprises the step of selecting a set of constraints to be used in said minimizing step.

Abstract

The present invention is directed to a method of modeling a complex system, the model produced by such a method, and a method of optimizing a complex system by optimizing such a model. The first step in the modeling method is to identify the activities that comprise the process. Measurable drivers for each activity are identified. The costs associated with each driver are identified as fixed and, where appropriate, variable components. Each activity is then represented as a function of its driver's cost components. Relationships between the drivers that are relevant to more than one activity are derived. A function that represents the process is built using the derived relationships. The model (function) thus produced is an expression of the entire process in terms of variables that are drivers for more than one activity within the process. Optimizing the modeled process is accomplished by optimizing the model constructed as described above for certain selected objective(s). The model can be modified by changing constraints thus enabling the user to run through a large number of "what if" scenarios to determine what is the best solution under varying conditions.

FIG. 1

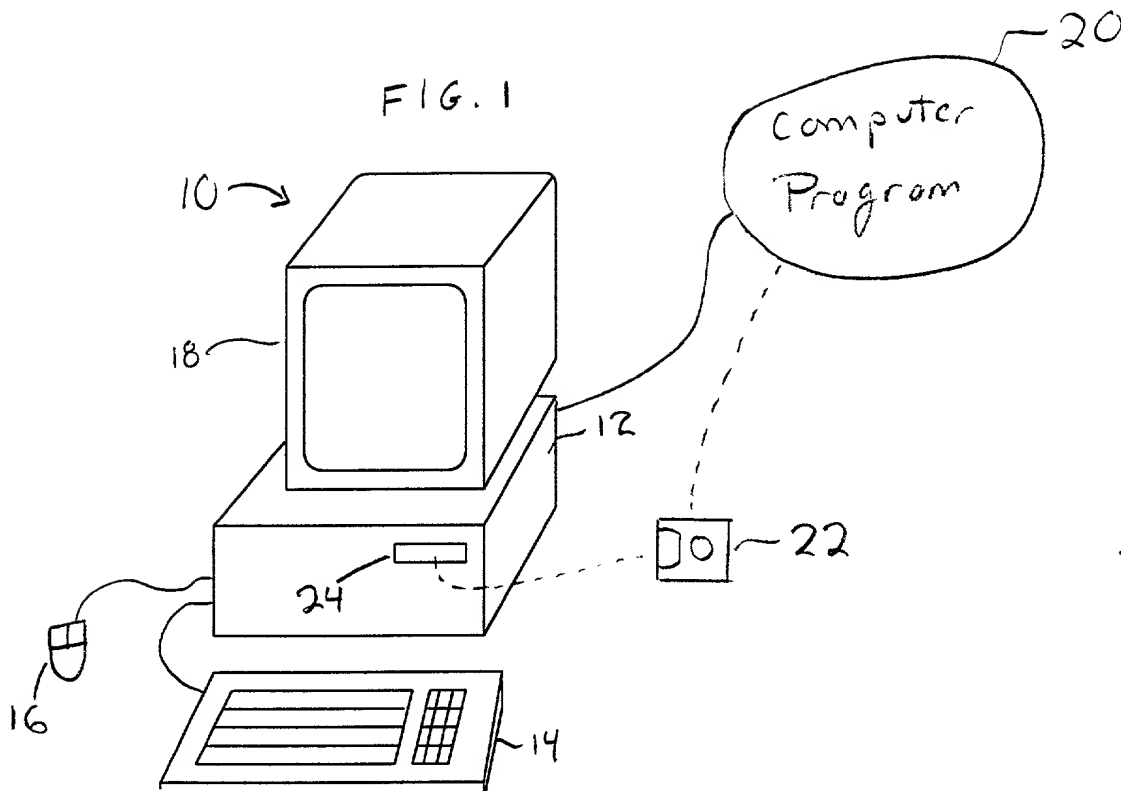


FIG. 2

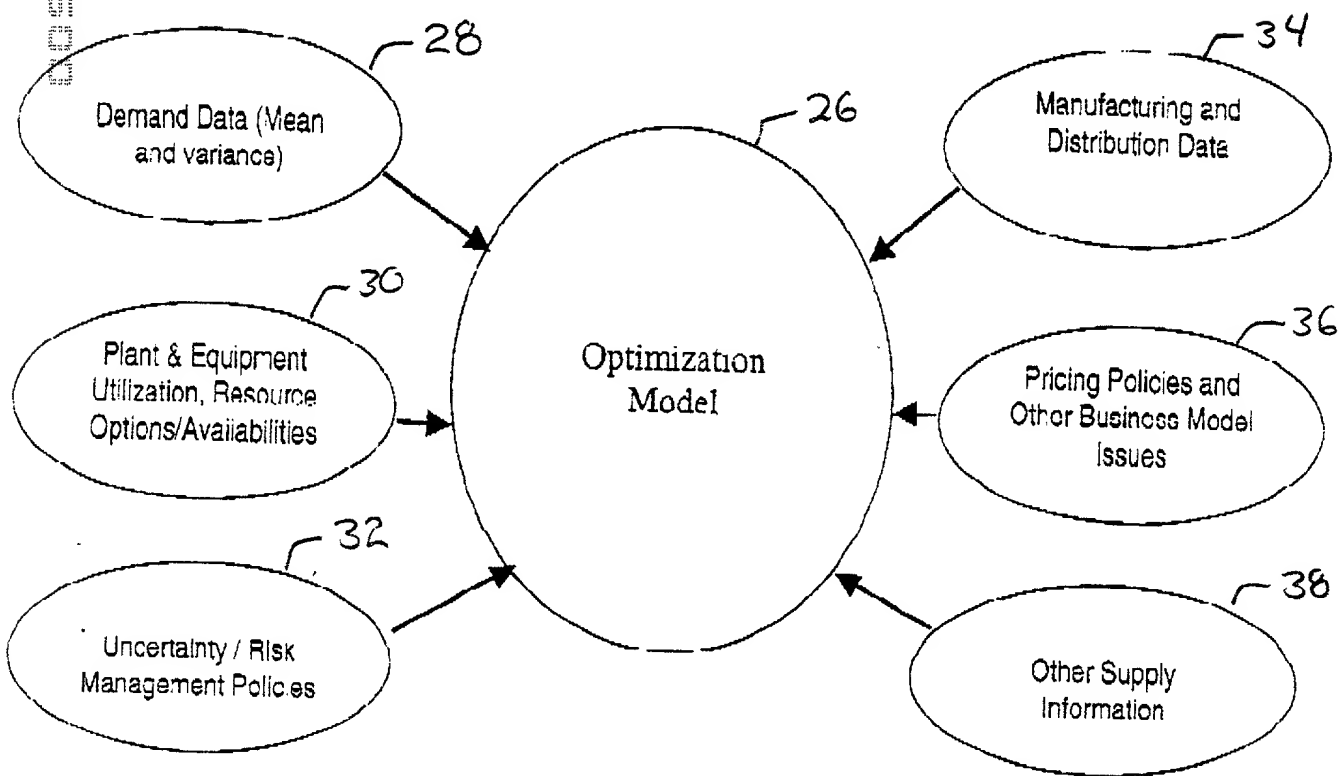


FIG. 3

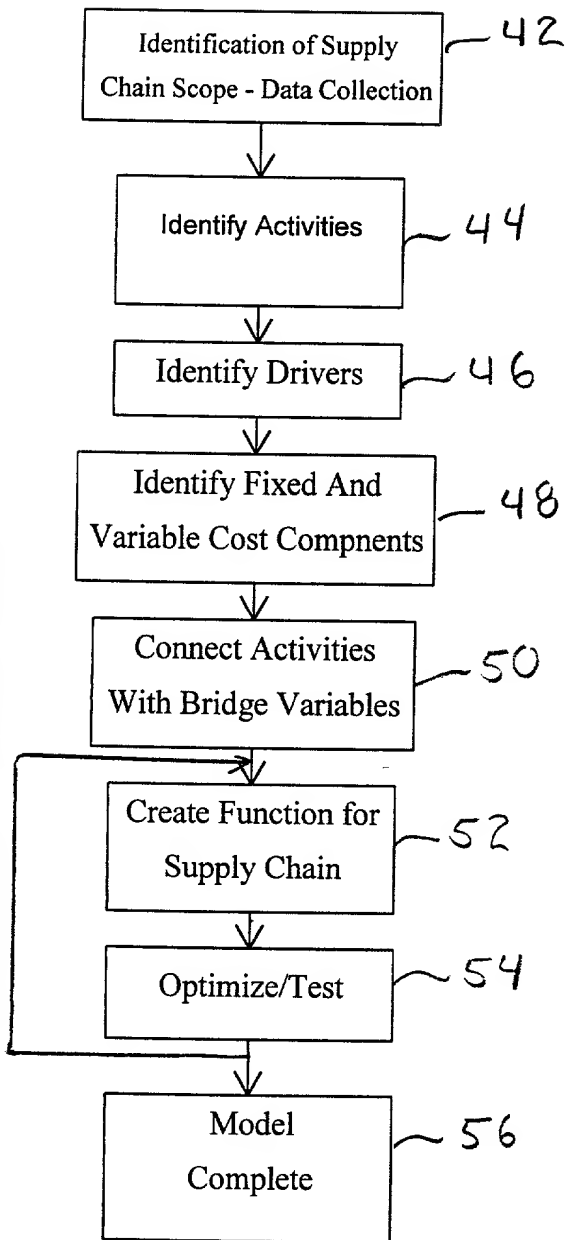


FIG. 4

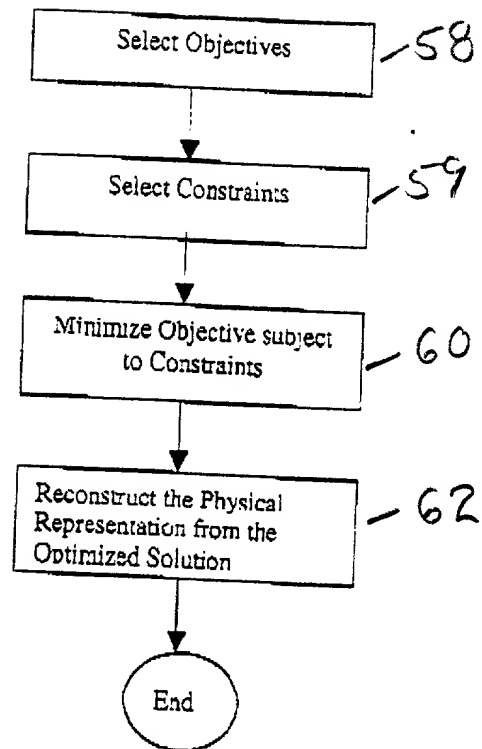


FIG. 5

What-If Inputs

- Freight costs
- Lead Times
- Holding Costs per type of product
- Store Demand Data: *Historical, Seasonality, Volatility*
- Existing Resources: *Number of Suppliers, Number of DCs, Number of Stores, Number of Trucks (assuming infinite)*
- Constraints: product freshness, warehouse space (assuming infinite), truck capacity



Model 26
Objective:

Minimize Total
System Cost



Optimal Outputs

- Order placement frequency
- Outbound delivery frequency
 - Produce
 - Other Items
- Optimal inventory levels
 - At DC Level
 - At Stores
- DC-Store Assignments: *What DC should serve which store co-ops?*